

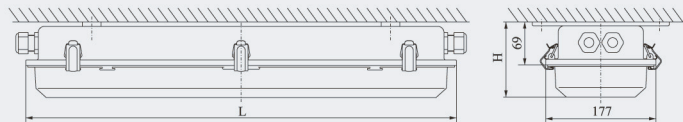


荧光舱顶灯 FLUORESCENT PENDANT LIGHT *Advanced Marine Solutions*

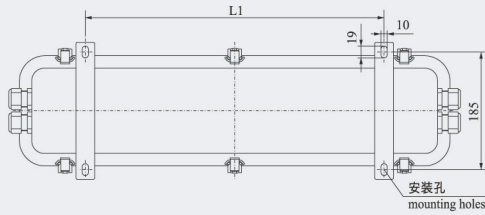


型号Type	L	L1	H
JCY22-2	692	480	134
JCY22-2E	692	480	134
JCY22-2EF	692	480	155
JCY32-2	992	700	134
JCY32-2E	992	700	134
JCY32-2EF	992	700	155
JCY42-2	1299	700	134
JCY42-2E	1299	700	134
JCY42-2EF	1299	700	155

适用范围The scope of application	适用于各类船舶有滴水、溅水和凝水的场所，如机炉舱、干货舱、轴隧、管弄、露天甲板等场所作照明之用； Applied to illumination of water dripping, water spattering, water coagulating place in ships, such as oven cabin, dry cabin, tunnel, pipeline and weather deck etc.								
型号 Type	JCY22-2	JCY22-2E	JCY22-2EF	JCY32-2	JCY32-2E	JCY32-2EF	JCY42-2	JCY42-2E	JCY42-2EF
功率Power	2*20W	2*20W+24V/15W		2*30W	2*30W+24V/15W		2*40W	2*40W+24V/15W	
重量Weight	7.2kg	7.2kg	8.0kg	9kg	9kg	9kg	11kg	11kg	12kg
电压Voltage	110V/60Hz, 220V/50Hz, 220V/60Hz								
功率因数Power factor	>0.85								
灯座Lamp holder	G13								
电缆外径Cable outside diameter	Φ 10- Φ 14								
防护等级Protection class	IP56								
环境温度 Ambient temperature	-30℃ ~ 55℃								

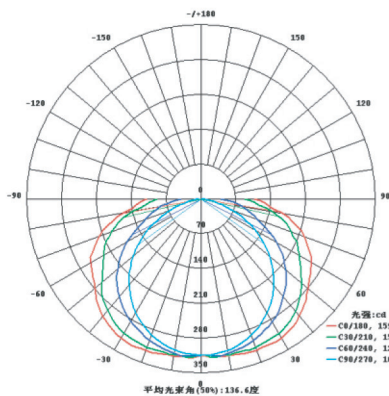

JCY22-2

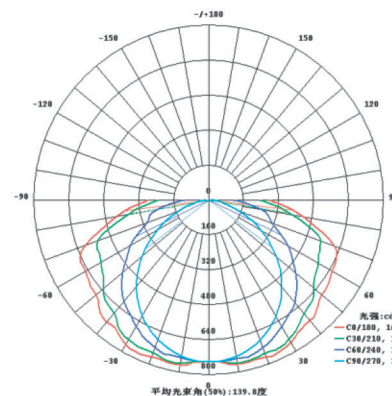

JCY42-2